


Place armature inside the mold.



Make the wire form a hip by bending.

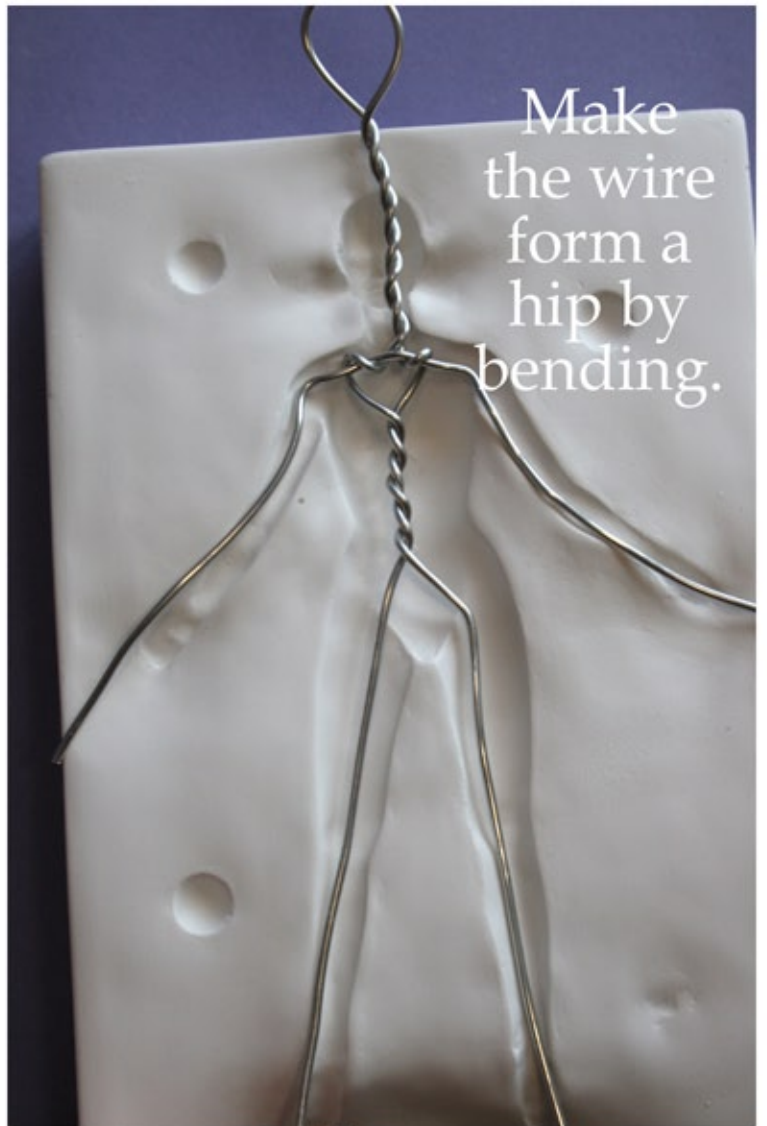

Make the other hip bend.



Cut off arm wire in the palm of the hand.